


Surface Mount Ultra Fast Recovery Rectifier

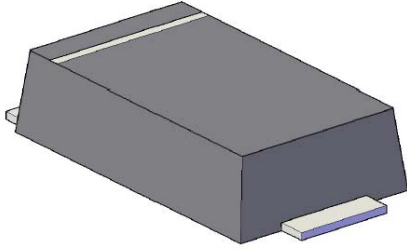


Features

- Low profile package
- Ideal for automated placement
- Guardring for overvoltage protection
- Low power losses, high efficiency
- High forward surge capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

For use in low voltage high frequency inverters, freewheeling, DC/DC converters, and polarity protection applications.



Mechanical Data

- **Package:** SOD-123HE
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

■ Maximum Ratings (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	U1AE	U1BE	U1CE	U1DE	U1FE	U1GE	U1HE	U1JE
Device marking code			U1AE	U1BE	U1CE	U1DE	U1FE	U1GE	U1HE	U1JE
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	V	50	100	150	200	300	400	500	600
Maximum RMS Voltage	V _{RMS}	V	35	70	105	140	210	280	350	420
Maximum DC blocking Voltage	V _{DC}	V	50	100	150	200	300	400	500	600
Average rectified output current @60Hz sine wave, Resistance load, TL (FIG.1)	I _O	A	1.0							
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, T _j =25°C	I _{FSM}	A	30							
Forward Surge Current (Non-repetitive) @1ms, square wave, 1 cycle, T _j =25°C			60							
Current squared time @1ms≤t≤8.3ms T _j =25°C	I ² t	A ² s	3.735							
Storage temperature	T _{stg}	°C	-55 ~ +150							
Junction temperature	T _j	°C	-55 ~ +150							



U1AE THRU U1JE

■Electrical Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	U1AE	U1BE	U1CE	U1DE	U1FE	U1GE	U1HE	U1JE
Maximum instantaneous forward voltage	V _F	V	I _{FM} =1.0A	0.92			1.25		1.7		
Maximum reverse recovery time	t _{rr}	ns	I _F =0.5A, I _R =1.0A, I _{rr} =0.25A	25						35	
Maximum DC reverse current at rated DC blocking voltage	I _R	μA	T _j =25°C	5							
			T _j =125°C	50							
Typical junction capacitance	C _j	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	17			15		16		

■Dynamic Characteristics

◆ U1AE THRU U1DE

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Reverse Recovery Time	T _{RR}	ns	T _j =25°C	I _F =1A, di/dt=-50A/us V _{RM} =30V	-	27	-
			T _j =25°C	I _F =1A di/dt=-200A/us V _{RM} =100V	-	18	-
			T _j =125°C		-	24	-
Peak recovery current	I _{RRM}	A	T _j =25°C	I _F =1A di/dt=-200A/us V _{RM} =100V	-	2.4	-
			T _j =125°C		-	3.9	-
Reverse recovery charge	Q _{rr}	nC	T _j =25°C	I _F =1A di/dt=-200A/us V _{RM} =100V	-	21.6	-
			T _j =125°C		-	46.6	-

◆ U1FE THRU U1GE

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Reverse Recovery Time	T _{RR}	ns	T _j =25°C	I _F =1A, di/dt=-50A/us V _{RM} =30V	-	26	-
			T _j =25°C	I _F =1A di/dt=-200A/us V _{RM} =200V	-	22	-
			T _j =125°C		-	31	-
Peak recovery current	I _{RRM}	A	T _j =25°C	I _F =1A di/dt=-200A/us V _{RM} =200V	-	1.9	-
			T _j =125°C		-	3.5	-
Reverse recovery charge	Q _{rr}	nC	T _j =25°C	I _F =1A di/dt=-200A/us V _{RM} =200V	-	21.1	-
			T _j =125°C		-	54.9	-

◆ U1HE THRU U1JE

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		Min	Typ	Max
Reverse Recovery Time	T _{RR}	ns	T _j =25°C	I _F =1A, di/dt=-50A/us V _{RM} =30V	-	38	-
			T _j =25°C	I _F =1A di/dt=-200A/us V _{RM} =400V	-	32	-
			T _j =125°C		-	52	-
Peak recovery current	I _{RRM}	A	T _j =25°C	I _F =1A di/dt=-200A/us V _{RM} =400V	-	2.9	-
			T _j =125°C		-	4.7	-
Reverse recovery charge	Q _{rr}	nC	T _j =25°C	I _F =1A di/dt=-200A/us V _{RM} =400V	-	45.8	-
			T _j =125°C		-	121.9	-



U1AE THRU U1JE

■ Thermal Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	U1AE	U1BE	U1CE	U1DE	U1FE	U1GE	U1HE	U1JE
Typical Thermal resistance	$R_{\theta J-A}^{(1)}$	$^\circ\text{C/W}$	65							
	$R_{\theta J-L}^{(1)}$		25							
	$R_{\theta J-C}^{(1)}$		20							

Note:
 (1) Thermal resistance between junction and ambient and between junction and lead mounted on P.C.B with 3mm*3mm copper pad areas.

■ Characteristics (Typical)

FIG.1: I_o -TL Cure

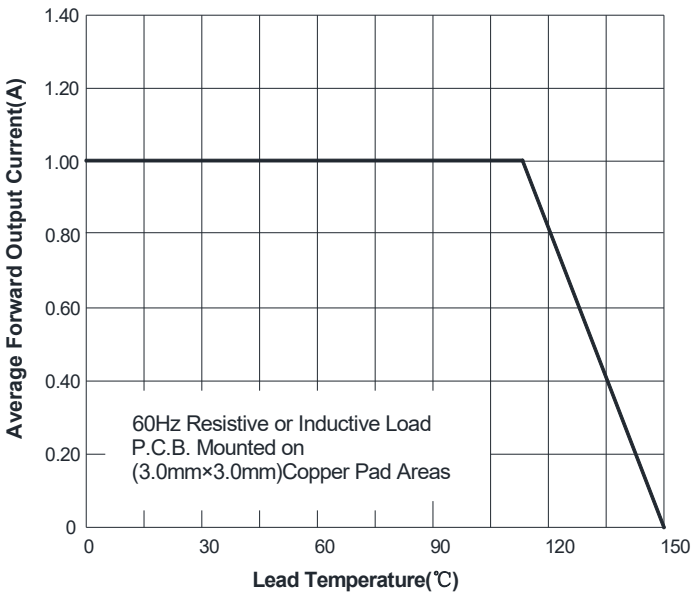


FIG.2: Forward Surge Current Capability

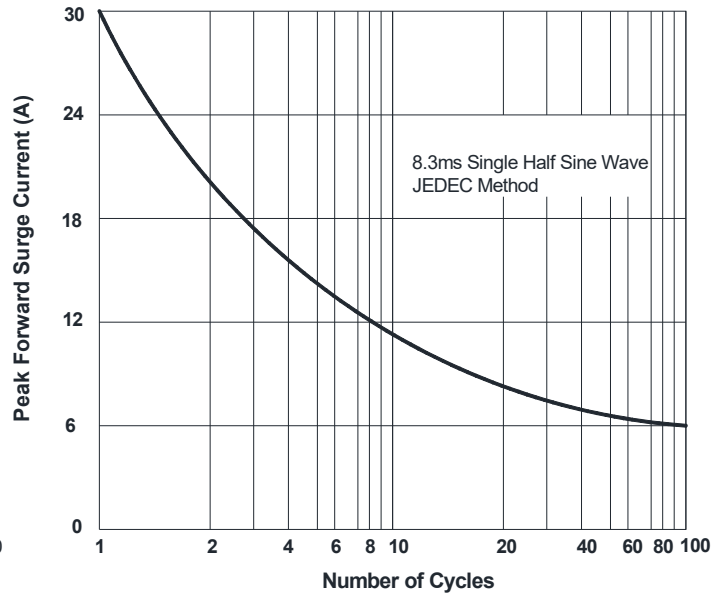


FIG.3: Typical Forward Characteristics


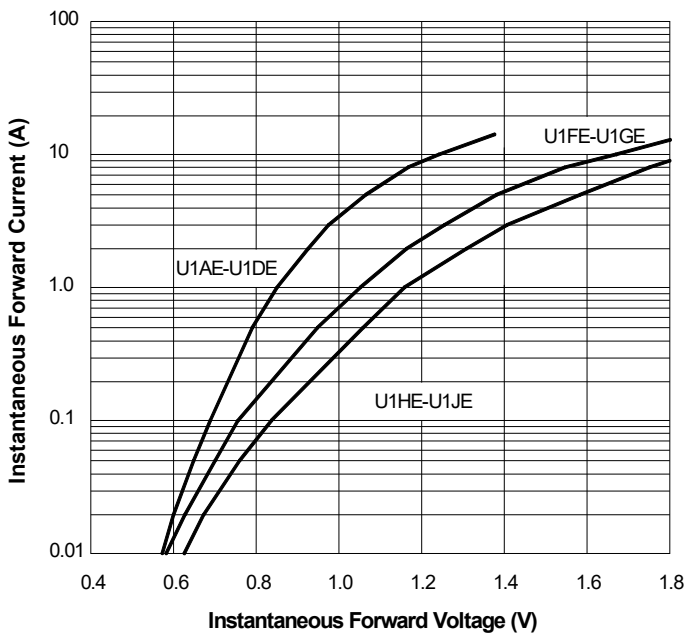



FIG.4: Typical Reverse Characteristics



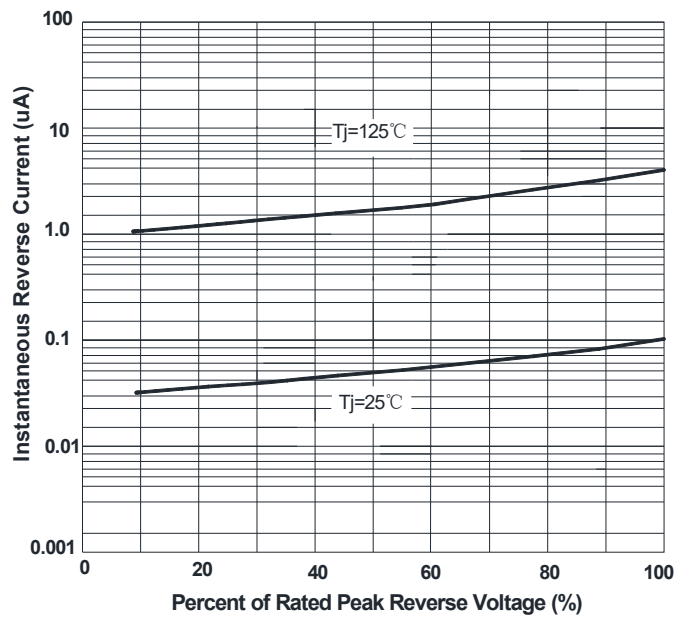


U1AE THRU U1JE

■ Outline Dimensions

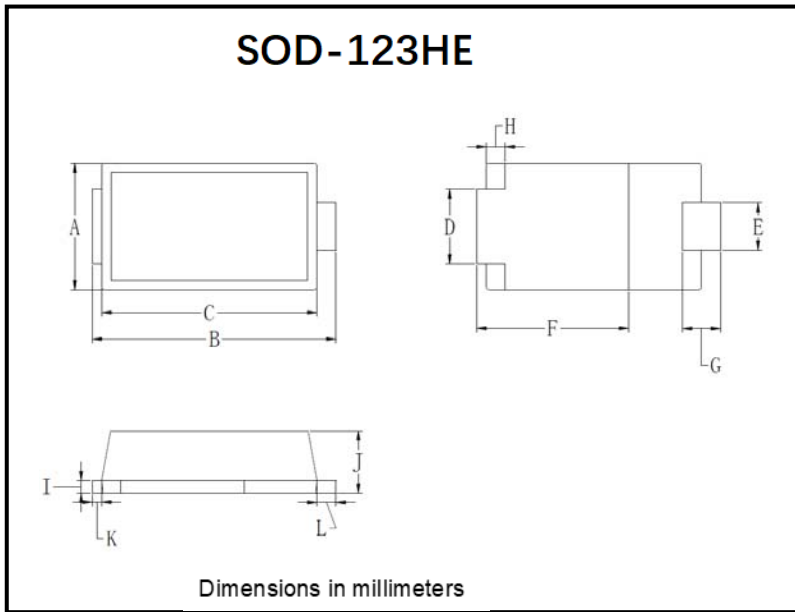

SOD-123HE		
Dim	Min	Max
A	1.88	2.18
B	3.70	4.00
C	3.19	3.61
D	1.05	1.35
E	0.61	0.91
F	2.20	2.90
G	0.40	0.80
H	0.30 TYP	
I	0.10	0.30
J	0.85	1.15
K	0.00	0.30
L	0.15	0.45

■ Suggested pad layout

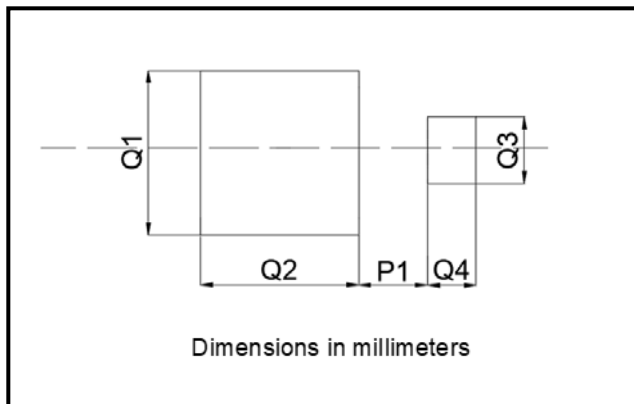

SOD-123HE	
Dim	Millimeters
P1	0.64
Q1	2.54
Q2	2.67
Q3	1.27
Q4	0.76



U1AE THRU U1JE

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.